



WeatherLock® G


Granulated Self-Sealing Ice & Water Barrier



Enhanced to provide peak protection.

WeatherLock® G Granulated Self-Sealing Ice & Water Barrier allows for proper water flow, helps in preventing damage caused by ice dams. Engineered for asphalt shingles, wood shakes and quarry slate roof assemblies.

- **Added protection**—Acts as a waterproof barrier in the most vulnerable sections of the roof to create a second line of defense. For optimal protection, apply to entire roof deck on 2:12 to 4:12 pitch roofs.
- **Superior tear resistance**—Resists cracking and breaking during installation.
- **Self-adhesive**—Adheres to roof deck and creates watertight seal around nails to prevent water migration. Split backer sheet for easy application and positioning on the roof deck.
- **Slip-resistant granulated surface**—Allows for better traction.
- **Taped selvedge edge**—Improves seal between courses.

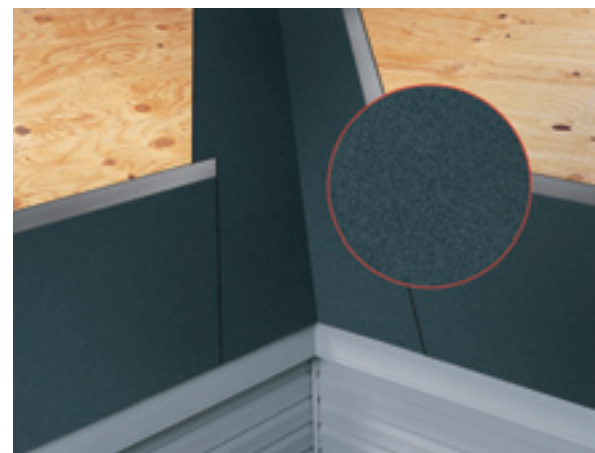

WeatherLock® G
Granulated Self-Sealing Ice & Water Barrier



The essentials for a healthy roofing system.

It takes more than just shingles to create a high-performance roof. It requires a system of products working together. Owens Corning™ Roofing Essentials™ Accessory Products work with our shingles to make up a roofing system that helps provide maximum durability for your roof. And the most protection for your home.

- a** VentSure® Ventilation Products
- b** PINK™ Fiberglas™ Blown-In Insulation
- c** Owens Corning™ Hip & Ridge Shingles
- d** Owens Corning™ Shingles
- e** Owens Corning™ Underlayment Products
- f** WeatherLock® Self-Sealing Ice & Water Barrier Products
- g** Owens Corning™ Starter Shingle Products
- h** RapidFlow® Gutter Drainage Protection
- i** Owens Corning™ Undereave Ventilation Products



**OWENS CORNING
ROOFING AND ASPHALT, LLC**
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO, USA 43659

1-800-GET-PINK™
www.roofing.owenscorning.com

Pub. No. 10009578-D. Printed in U.S.A. November 2010. THE PINK PANTHER™ & ©1964–2010 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. ©2010 Owens Corning.



WeatherLock® G Granulated Self-Sealing Ice & Water Barrier Construction

Surface

Granulated asphalt surface

Interior Reinforcement

Durable Fiberglas® Mat

Adhesive Styrene

Mixture of Styrene-Butadiene-Styrene (SBS) and asphalt

Removable Backing

Split-sheet peel-away poly backer

Application

Engineered for asphalt shingles, wood shakes and quarry slate roof assemblies

Typical Values**

Property	1 sq. roll	2 sq. roll
Length	33.3 ft. (10.2 m)	66.7 ft. (21.3 m)
Width	3 ft. (.91 m)	3 ft. (.91 m)
Area	100 sq. ft. (9.3 m ²)	200 sq. ft. (19.4 m ²)

Applicable Standards and Codes

ASTM D 1970

UL Class A, Class C

Florida Building Code

Uniform Building Code Tables 15B-1, 15B-2, 15D-1 and 15D-2

ICC ESR 1783

Miami-Dade County Approved†

Physical Properties

Property	Test Method	Typical Values**
Thickness	—	53 mils
Slip Resistance	Asphalt Saturated Felt	Passed
Tensile Strength	ASTM D 412	—
Longitudinal (md)	—	25 lbs./in.
Transverse (cd)	—	25 lbs./in.
Elongation at Break (modified bitumen portion)	ASTM D 2523	10
Permeance	ASTM E 96	.05 max
Adhesion to Plywood, 40°F	ASTM D 903	4.0 lbs./ft.
Adhesion to Plywood, 75°F	ASTM D 903	12.0 lbs./ft.
Tear Resistance	ASTM D 4037	—
Longitudinal	—	20 lbs.
Transverse	—	20 lbs.
Sealability Around Nail	ASTM D 1970	Passed
Low Temperature Flexibility	ASTM D 1970	Passed
Waterproofing Integrity after Low Temperature Flex	ASTM D 1970	Passed
Waterproofing Integrity of Lap	ASTM D 1970	Passed

* Ensure proper ventilation is met when applied over the entire roof deck.

** All values are approximate.

† Applies for all areas that recognize Miami-Dade County Building Code.